



US007012552B2

(12) **United States Patent**
Baugh et al.

(10) **Patent No.:** **US 7,012,552 B2**
(45) **Date of Patent:** ***Mar. 14, 2006**

(54) **CIVIL AVIATION PASSIVE COHERENT LOCATION SYSTEM AND METHOD**

(75) Inventors: **Kevin W. Baugh**, Gaithersburg, MD (US); **Richard Lodwig**, Gaithersburg, MD (US); **Robert Benner**, Gaithersburg, MD (US)

(73) Assignee: **Lockheed Martin Corporation**, Bethesda, MA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **09/982,948**

(22) Filed: **Oct. 22, 2001**

(65) **Prior Publication Data**

US 2002/0053982 A1 May 9, 2002

Related U.S. Application Data

(60) Provisional application No. 60/241,738, filed on Oct. 20, 2000.

(51) **Int. Cl.**
G08B 21/00 (2006.01)

(52) **U.S. Cl.** **340/945**; 342/37; 342/55; 342/357.01; 342/453

(58) **Field of Classification Search** 340/961, 340/945; 701/301, 120; 342/36, 37, 42, 342/52, 55, 57, 76, 104, 180, 450, 357, 455, 342/59, 453, 120, 195, 357.01

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,242,487 A 3/1966 Hammack 343/7
3,270,340 A 8/1966 Hammack 343/7

3,286,263 A 11/1966 Hammack 343/112
3,573,611 A 4/1971 Bergemann et al. 324/57
3,706,096 A 12/1972 Hammack 343/9
3,786,509 A 1/1974 Applebaum et al. 342/17.1
3,795,911 A 3/1974 Hammack 343/9
3,972,000 A 7/1976 Desblache et al. 329/105
4,063,073 A * 12/1977 Strayer
4,114,153 A 9/1978 Neidell 343/9
4,270,150 A 5/1981 Diermann et al. 360/10

(Continued)

FOREIGN PATENT DOCUMENTS

DE 38 18 813 C 6/1999

(Continued)

OTHER PUBLICATIONS

“Bistatic Laptop Radar”, Ogrodnik, IEEE 1996 National Radar Conf, Ann Arbor, Mich. May 13-16, 1996, pp. 369-373.*


(Continued)

Primary Examiner—Brent A. Swarthout
(74) *Attorney, Agent, or Firm*—Marsh Fischmann & Breyfogle LLP

(57) **ABSTRACT**

A civil aviation passive coherent location system and method is disclosed. A receiver subsystem receives reference transmissions from an uncontrolled transmitter. The receiver subsystem also receives scattered transmissions originating from the uncontrolled transmitter and scattered by an airborne object. The received transmissions are compared to determine measurement differentials, such a frequency-difference-of-arrival, a time-difference-of-arrival and an angle of arrival. From the measurement differentials, an object state estimate is determined. A previous state estimate may be updated with the determined state estimate. Processing subsystems determine the measurement differentials and state estimates.

32 Claims, 3 Drawing Sheets

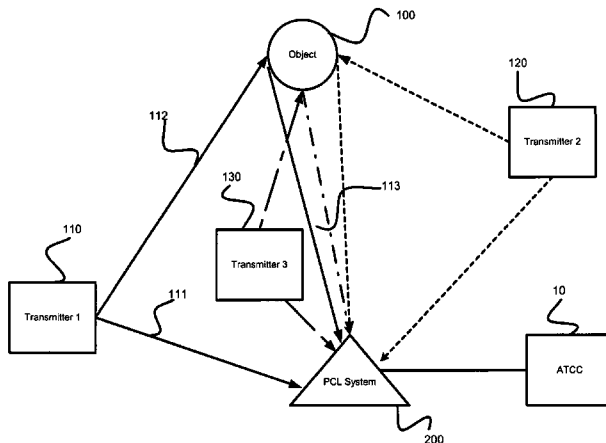

U.S. PATENT DOCUMENTS

4,271,412 A	6/1981	Glass et al.	343/5 FT
4,284,663 A	8/1981	Carruthers et al.	427/164
4,314,376 A	2/1982	Williams	455/212
4,451,858 A	5/1984	Johnson, Jr.	360/32
4,492,990 A	1/1985	Johnson, Jr.	360/32
4,654,696 A	3/1987	Dayton et al.	358/11
4,727,373 A	2/1988	Hoover	342/25
4,837,574 A	6/1989	Hill	342/27
4,888,641 A	12/1989	Isnardi et al.	358/141
4,994,809 A	2/1991	Yung et al.	342/108
5,043,805 A	8/1991	Citta et al.	358/83
5,058,024 A *	10/1991	Inselberg	
5,127,021 A	6/1992	Schreiber	375/1
5,136,380 A	8/1992	Cho	358/141
5,173,704 A	12/1992	Buehler et al.	342/26
5,192,955 A	3/1993	Hoang	342/80
5,214,501 A	5/1993	Cavallerano et al.	358/12
5,252,980 A	10/1993	Gray et al.	342/59
5,253,243 A	10/1993	Suzuki	369/48
5,285,470 A	2/1994	Schreiber	375/1
5,289,277 A	2/1994	Blanchard et al.	348/441
5,315,445 A	5/1994	Fukumoto et al.	360/19.1
5,337,085 A	8/1994	Lee et al.	348/398
5,381,156 A	1/1995	Bock et al.	342/126
5,434,570 A	7/1995	Wurman	342/26
5,451,960 A	9/1995	Kastella et al.	342/59
5,452,015 A	9/1995	Hulyalkar	348/608
5,525,995 A	6/1996	Benner	342/90
5,604,503 A	2/1997	Fowler et al.	342/378
5,623,267 A	4/1997	Wurman	342/26
5,742,591 A	4/1998	Himayat et al.	370/286
5,793,223 A	8/1998	Frankeny	326/30
5,892,879 A	4/1999	Oshima	386/46
5,912,640 A	6/1999	Bradford et al.	342/99
5,924,980 A	7/1999	Coetzee	600/300
5,943,170 A	8/1999	Inbar et al.	359/561
5,946,238 A	8/1999	Campardo et al.	365/185.2
5,990,831 A	11/1999	McDowell	342/378
6,002,347 A	12/1999	Daly et al.	340/963
6,029,558 A	2/2000	Stevens et al.	89/36.17
6,031,485 A	2/2000	Cellai et al.	342/131
6,031,879 A	2/2000	Pace et al.	375/316
6,038,201 A	3/2000	Kim	369/48
6,052,421 A	4/2000	Richardson et al.	375/346
6,057,877 A	5/2000	Limberg	348/21
6,133,873 A	10/2000	Krasner	342/357.12
6,135,952 A	10/2000	Coetzee	600/336
6,167,132 A	12/2000	Krone et al.	379/399
6,167,134 A	12/2000	Scott et al.	379/413

6,222,922 B1	4/2001	Scott et al.	379/377
6,424,290 B1 *	7/2002	O'Neil et al.	342/55
6,522,295 B1 *	2/2003	Baugh et al.	342/453

FOREIGN PATENT DOCUMENTS

FR	2 776 438 A	9/1999
JP	05-027020	2/1993
WO	WO 01/84181 A2	11/2001

OTHER PUBLICATIONS

Roger W. Schwenke; Sensitivity Analysis Of An Estimator-Correlator For The Detection Of Spread Targets With Multiple Discrete Highlights; The Pennsylvania State University Graduate School; Dec. 2000; p. 1-13.

J. M. Holt, P. J. Erickson, A. M. Gorezyca, T. Grydeland; MIDAS-W: a workstation-based incoherent scatter radar data acquisition system; Annales Geophysicae; Jun. 21, 2000; p. 1231-1241.

David R. Martinez; Application of Parallel Processors to Real-Time Sensor Array Processing; MIT Lincoln Laboratory; Jun. 3, 1999; p. 1-7.

Wu Jianqi, He Ruilong and Jiang Kai; Researches of A New Kind of Advanced Metric Wave Radar; I.E.E.E.; Jun. 1999; p. 194-197.

P.E.Howland; "Target tracking using television-based bistatic radar";IEE Proc.-Radar, Sonar Navig., vol. 146, No. 3, Jun. 1999; p. 166-174.

Ogrodnik, Robert F. "Fusion TechBroad Area Surveillance Exploiting Ambient Signals via Coherent Techniques". Proceedings of the 1994 IEEE International Conference on Multisensor Fusion and Integration for Intelligent Systems (MFI'94). Las Vegas, NV. Oct. 2-5, 1994.

Poullin, D., Lesturgle, M. et al.; Multistatic Radar Using Noncooperative Transmitters; International Conference on Radar, Proceedings of International Radar '94 Conference; Paris, Frances, May 3-6, 1994; p. 370-376.

Howland, P. E.; A Passive Metric Radar Using a Transmitter of Oppurtunity; International Conference on Radar Proceedings of International Radar '94 Conference; Paris, France; May 3-6, 1994; p. 251-256.

Howland, P. E.; Target Tracking Using Television-Based Bistatic Radar; IEE Proc.: Radar, Sonar & Navig., vol. 146, No. 3; Jun. 1999; p. 166-174.

* cited by examiner

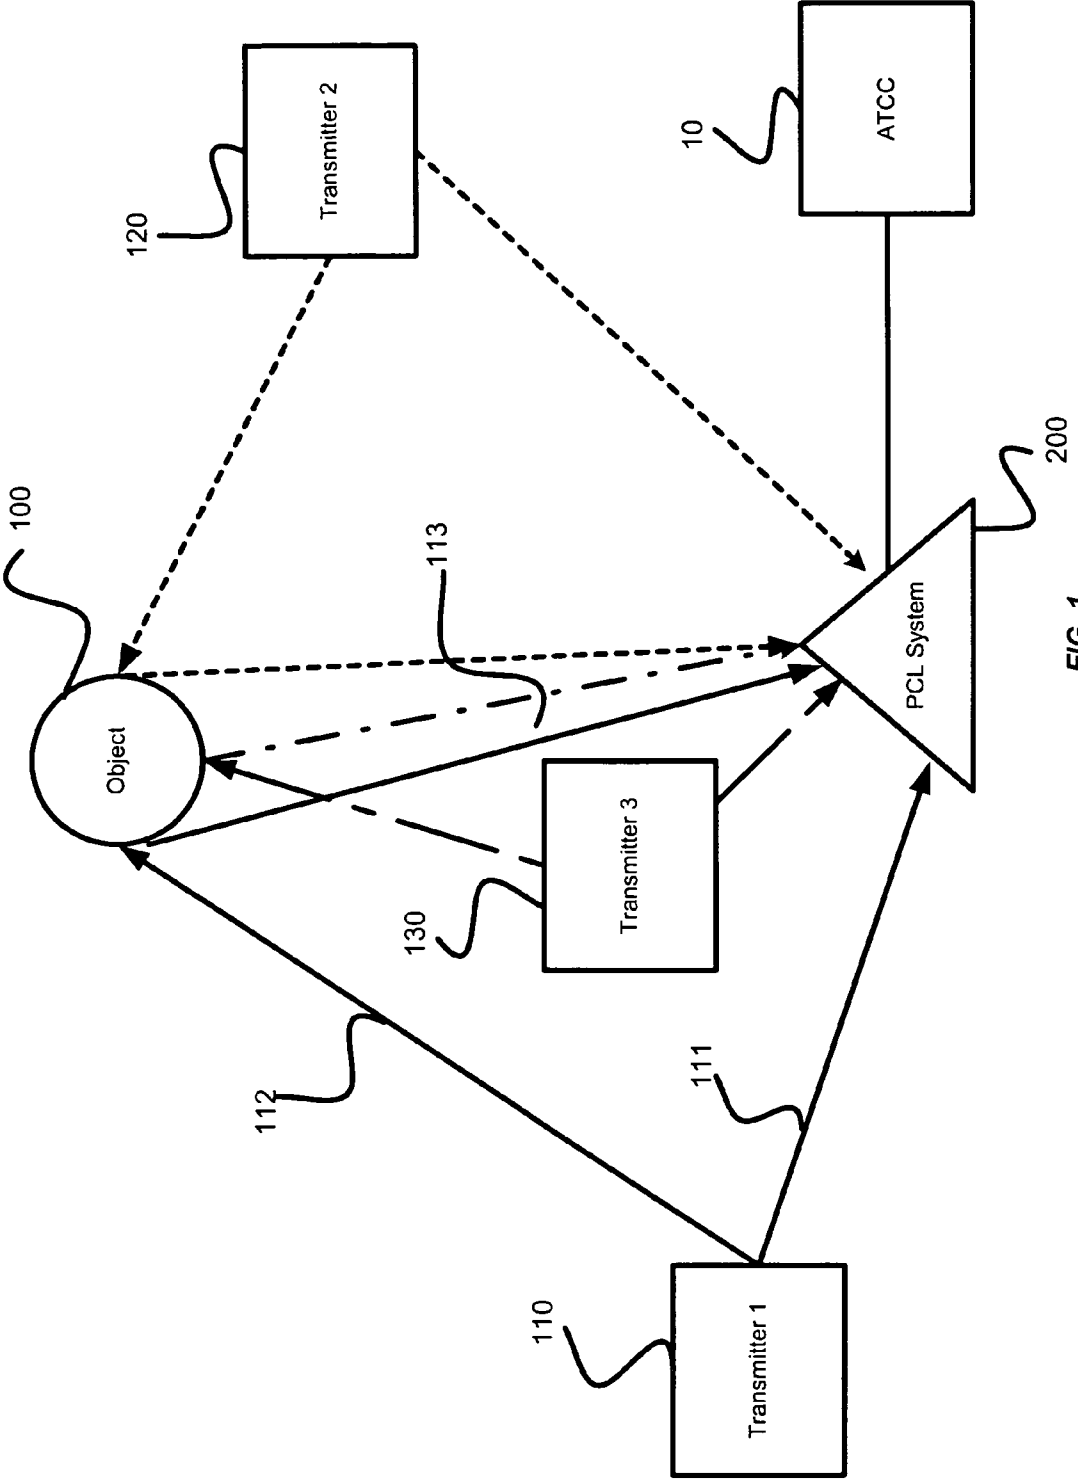


FIG. 1

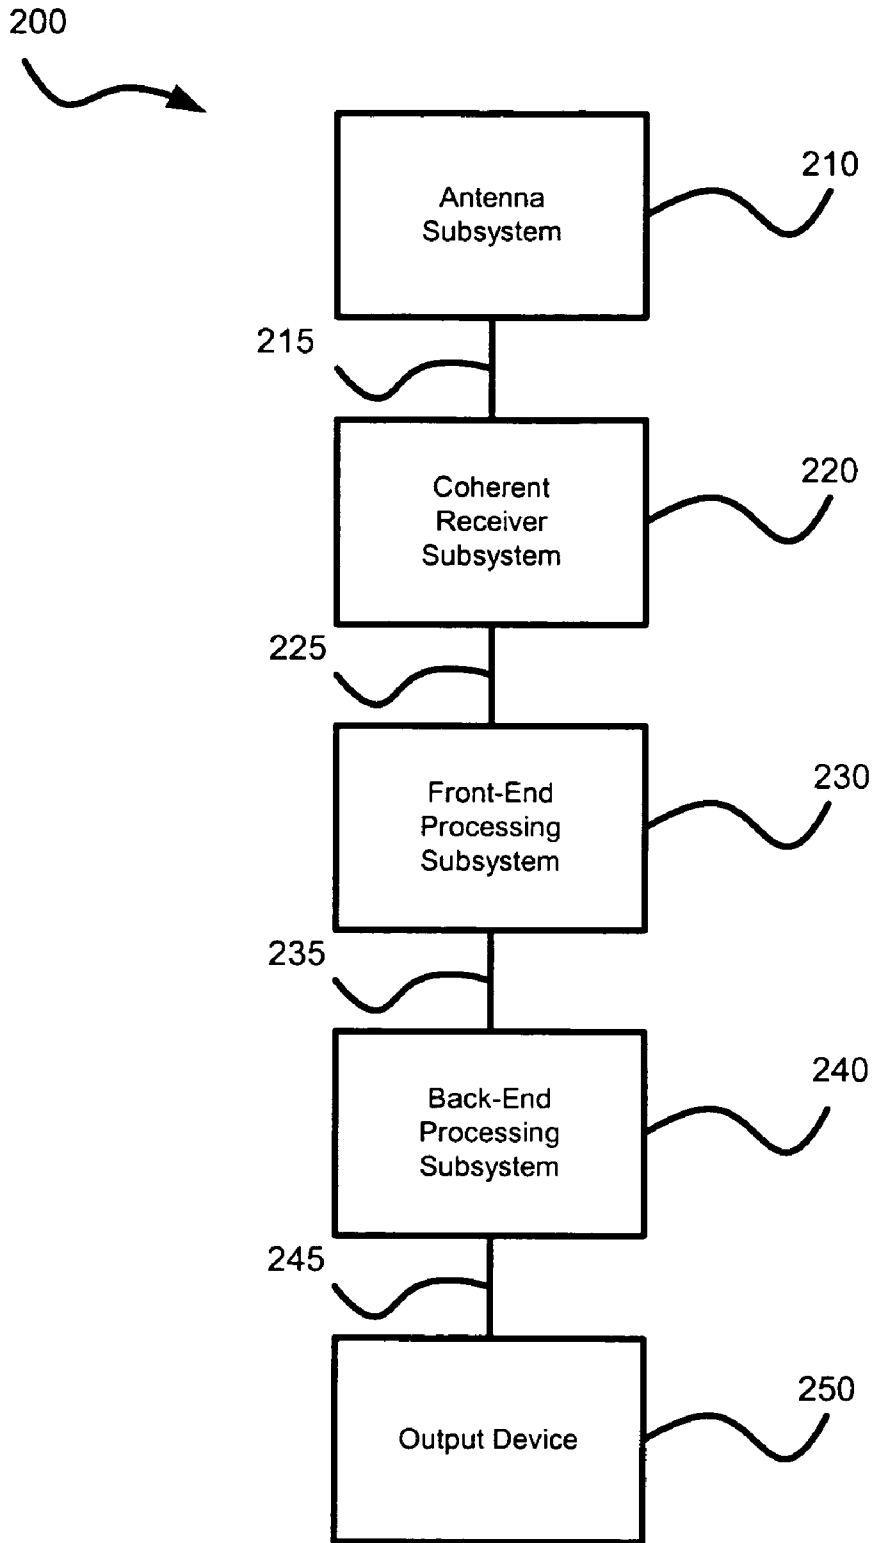


FIG. 2

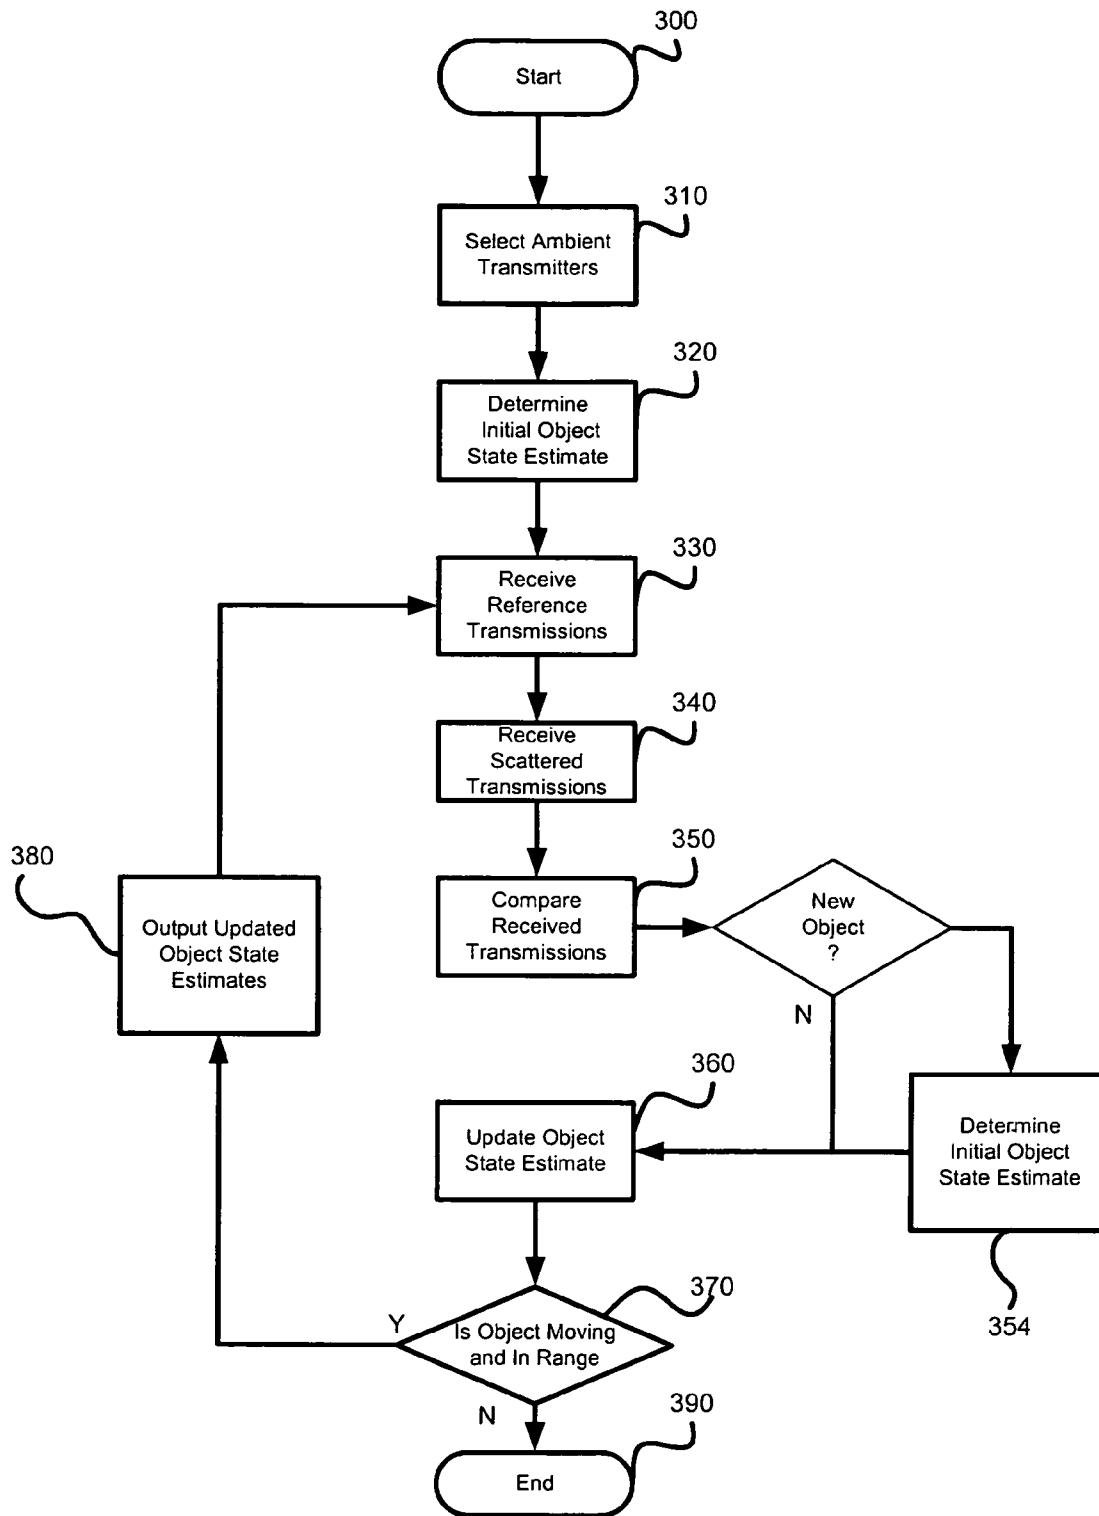


FIG. 3

CIVIL AVIATION PASSIVE COHERENT LOCATION SYSTEM AND METHOD

CROSS REFERENCE TO RELATED APPLICATIONS

This present application claims benefit of U.S. Provisional Application No. 60/241,738 for CIVIL AVIATION PASSIVE COHERENT LOCATION METHOD AND SYSTEM, filed Oct. 20, 2000, which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a passive coherent location ("PCL") system and method, and more particularly to a PCL system and method for use in an aviation environment, such as civil aviation.

2. Description of Related Art

A number of conventional civil aviation radar systems have particularly high life-cycle costs due to the initial cost and the maintenance cost of the radar system. Furthermore, because conventional civil aviation radar systems typically broadcast electromagnetic signals, which is a regulated activity, extensive regulatory procurement and compliance costs are associated with operating current civil aviation radar systems.

Additionally, extensive physical, regulatory, and economic disincentives prevent transporting such systems on a temporary or mobile basis. For example, transporting a current civil aviation radar system to a special event such as the Olympics, a fireworks display, or other event would pose numerous disincentives, including the assessment of environmental impact proper licensing from various regulatory agencies and the costs associated with moving the electromagnetic signal transmitter.

SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a PCL system and method that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

In an embodiment, a civil aviation PCL system receives transmissions from a plurality of uncontrolled transmitters. In a preferred embodiment, the uncontrolled transmitters may include radio and television broadcast stations. Additionally, in one embodiment, the civil aviation PCL system may use signals from transmitters operated by operationally independent entities. The signals from uncontrolled transmitters may be used independently or in conjunction with signals from transmitters operated by the organization controlling the PCL system.

A civil aviation PCL system may include an antenna subsystem, a coherent receiver subsystem, a front-end processing subsystem, a back-end processing subsystem, and an output device. Each of these subsystems is connected by a communication link, which may be a system bus, a network connection, a wireless network connection, or other type of communication link.

The present invention may be used to monitor the airspace of a predetermined location using ambient transmissions from at least one uncontrolled transmitter. In a preferred embodiment, ambient transmissions are scattered by an object and received by a PCL system. These scattered transmissions are compared with a reference transmission that is received directly from the uncontrolled transmitter to the PCL system. In particular, the frequency-difference-of-arrival between the scattered transmission and the reference

transmission is determined, which allows the radial velocity of the object to be determined. In a preferred embodiment, the predetermined location is an airport. The present invention may be used in conjunction with or in lieu of a conventional radar system.

The present invention also may be used to monitor the airspace of a predetermined location using ambient transmissions from at least one uncontrolled transmitter and using initial position information relating to an object approaching the predetermined location. This initial position information may include an electronic or verbal communication of the object's position at a predetermined time. For example, a plane approaching an airport may provide the system with its position, thereby allowing the system to quickly establish an accurate track for the plane.

The present invention also may be used to provide enhanced airspace awareness around a predetermined location as well as enhanced ground-traffic awareness within the predetermined location using ambient transmissions from at least one uncontrolled transmitter. In a preferred embodiment, the predetermined location is an airport and the objects include airplanes and ground vehicles. The system may receive and/or maintain positional information on objects approaching and/or within a boundary associated with the airport.

The present invention also may be used to enable a mobile radar system that provides enhanced airspace awareness during a predetermined event using ambient transmissions from at least one uncontrolled transmitter. In a preferred embodiment, the present invention is used as part of a vehicle-based monitoring system in which a vehicle is deployed to a predetermined location to receive ambient transmissions from at least one uncontrolled transmitter. This wheeled vehicle may be a non-commercial vehicle, such as a passenger van.

The present invention also may be used to select a subset of ambient transmission signals from a plurality of ambient transmission signals based on a set of predetermined criteria.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

FIG. 1 illustrates a diagram of a plurality of transmitters, an object, and a PCL system in accordance with an embodiment of the present invention;

FIG. 2 illustrates a block diagram of a civil aviation PCL system in accordance with an embodiment of the present invention; and

FIG. 3 illustrates a flowchart for operating a civil aviation PCL system in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred embodiment of the present invention, examples of which are illustrated in the drawings.

FIG. 1 illustrates a diagram of a plurality of transmitters, an object, and a PCL system in accordance with an embodiment of the present invention. In a preferred embodiment, a

PCL system **200** receives transmissions from a plurality of uncontrolled transmitters **110**, **120**, and **130**. The uncontrolled transmitters **110**, **120**, and **130** may include radio and television broadcast stations, national weather service transmitters, radionavigational beacons (e.g., VOR), and transmitters supporting current and planned airport services and operations (e.g., automatic dependant surveillance-broadcast), any of which may or may not be under the operational control of the entity controlling PCL system **200**. Additionally, PCL system **200** may use signals from transmitters operated by operationally independent entities. More preferably, the signals are frequency modulated (“FM”) or high definition television signals (“HDTV”) transmitted from the appropriate transmitters. Additional transmitters (not shown) may be present and useable by a particular PCL system **200**, which may have a system and method for determining which subset of possible ambient signals to use, as disclosed in greater detail below.

In one embodiment, transmitters **110**, **120**, and **130** are not under the control of the entity controlling PCL system **200**. In a preferred embodiment, transmitters **110**, **120**, and **130** are radio and television broadcast stations and PCL system **200** is controlled by an airport entity, such as an air traffic control center **10**. The signals from uncontrolled transmitters may be used independently or in conjunction with signals from transmitters operated by air traffic control center **10**.

Turning to the operation of the present invention, transmitters **110**, **120**, and **130** transmit low-bandwidth, electromagnetic transmissions in all directions. Exemplary ambient transmissions are represented in FIG. 1, including ambient transmissions **111** and **112**. Some of these ambient transmissions are scattered by object **100** and received by PCL system **200**. For example, ambient transmission **112** is scattered by object **100**, and scattered transmission **113** is received by PCL system **200**. Additionally, reference transmission **111** is received directly by PCL system **200**. Reference transmission **111** may be an order of magnitude greater than scattered transmission **113**. PCL system **200** compares reference transmission **111** and scattered transmission **113** to determine positional information about object **100**. For purposes of this application, positional information includes any information relating to a position of object **100**, including three-dimensional geographic state (hereinafter geographic state), linear and radial rate of change of geographic state (i.e., velocity), and linear and radial change of velocity (i.e., acceleration). The positional information then may be forwarded to air traffic control center **10**.

In particular, the system determines the frequency-difference-of-arrival (“FDOA”) between the scattered transmission and the reference transmission, which in turn allows the radial velocity of the object to be determined. The present invention may rely on such uncontrolled transmitters as low-bandwidth transmitters, which as will be understood yield relatively poor time-delay resolution and relatively good frequency-difference resolution. This frequency-difference resolution, however, does not provide geographic state information directly, but radial velocity information which can be used to derive geographic state information in accordance with the present invention. Accordingly, the preferred embodiment of the present invention relies primarily upon frequency-difference-of-arrival information to determine an object’s geographic state.

In one embodiment, reference transmissions and scattered transmissions from multiple transmitters **110**, **120**, and **130** are used to quickly and reliably to resolve the geographic

state of object **100**. Furthermore, the system may receive and/or maintain initialization information, as disclosed in greater detail below.

FIG. 2 depicts a block diagram a civil aviation PCL system in accordance with an embodiment of the present invention. PCL system **200** includes antenna subsystem **210**, coherent receiver subsystem **220**, front-end processing subsystem **230**, back-end processing subsystem **240**, and output device **250**. Each of these subsystems may be connected by a communication link **215**, **225**, **235**, and **245**, which may be a system bus, a network connection, a wireless network connection, or other type of communication link. In a preferred embodiment, there are no moving components within the radar system. Select components are described in greater detail below.

Antenna subsystem **210** receives electromagnetic transmissions, including scattered transmission **113** and reference transmission **111**. Preferably antenna subsystem **210** includes a structure to allow the detection of the direction from which the scattered transmission arrives, such as a phased array which measures angle-of-arrival of scattered transmission **113**. Preferably, antenna subsystem **210** covers a broad frequency range.

Coherent receiver subsystem **220** receives the output of antenna subsystem **210** via antenna-to-receiver link **215**. In one embodiment, coherent receiver subsystem **220** comprises an ultrahigh dynamic range receiver. In a preferred embodiment, the dynamic range of the coherent receiver is in excess of 120 dB instantaneous dynamic range. Coherent receiver subsystem **220** may be tuned to receive transmissions of a particular frequency plus or minus a predetermined variance based on the anticipated Doppler shift of the scattered transmission. For example, receiver subsystem **220** may be tuned to receive transmissions having a frequency of transmitter **110** plus or minus an anticipated Doppler shift. Coherent receiver subsystem **220** preferably outputs digitized replicas of scattered transmission **113** and reference transmission **111**.

In one embodiment, front-end processing subsystem **230** comprises a high-speed processor configured to receive the digitized transmission replicas and determine the frequency-difference-of-arrival. In another embodiment, front-end processing subsystem **230** comprises a special purpose hardware device, large scale integrated circuits, or an application-specific integrated circuit. In addition to determining the frequency-difference-of-arrival, front-end processing subsystem **230** may determine the time-difference-of-arrival and the angle-of-arrival of the digitized transmissions. Appropriate algorithms may be considered for these calculations.

Back-end processing subsystem **240** comprises a high-speed general processor configured to receive the output of the front-end processing subsystem **230** and to determine positional information, particularly geographic state, for object **100**. For a detailed description of a system and method for determining geographic state for an object based on frequency-difference-of-arrival measurements, refer to U.S. Pat. No. 5,525,995 entitled DOPPLER DETECTION SYSTEM FOR DETERMINING INITIAL POSITION OF A MANEUVERING TARGET issued Jun. 11, 1996, assigned to Loral Federal Systems Company, incorporated herein by reference.

Communication between front-end processing subsystem **230** and back-end processing subsystem **240** may be implemented by processor communication link **235**. In a preferred embodiment, processor communication link **235** is implemented using a commercial TCP/IP local area network. In

5

another embodiment, processor communication link **235** may be implemented using a high speed network connection, a wireless connection, or another type of connection that allows front-end processing subsystem **230** and back-end processing subsystem **240** to be remotely located relative to one another. In one embodiment, front-end processing system **240** may compress digitized transmission replicas to decrease traffic across processor communication link **235** despite the associated cost in loss of data or additional processing requirements.

Data may be transmitted across processor communication link **235** only upon the occurrence of a predetermined event, such as a user request. For example, the present invention may be used to acquire and temporarily buffer digitized transmission replicas by front-end processing subsystem **230**. Over time, older digitized transmission replicas may be overwritten by newer digitized transmission replicas if no request is made by a user. However, upon request, buffered digitized transmission replicas may be transmitted for analysis to back-end processing subsystem **240**. This aspect of the present invention may be used to reconstruct an aircraft accident situation, for example.

Although it is possible to implement the present invention on a single processing unit, in a preferred embodiment back-end processing subsystem **240** and front-end processing subsystem **230** are implemented using two independent general or special purpose processors in order to increase modularity and to enable specialized processing hardware and software to be implemented for the logically discrete tasks performed by each of these subsystems. For example, having the processors separate allows enhanced system robustness and increases ease of installation.

Output device **250** may comprise a computer monitor, a datalink and display, a network connection, a printer or other output device. In a preferred embodiment, geographic state information is provided simultaneously to an air traffic controller and a pilot. Geographic state information also may be provided to other entities and users. An output device **250** may additionally provide information relating to an accuracy estimate of the geographic state information as determined by back-end processing subsystem **240**. Output device communication link may comprise a high-speed bus, a network connection, a wireless connection, or other type of communication link.

FIG. **3** depicts a flowchart for operating a civil aviation PCL system in accordance with an embodiment of the present invention. By way of overview, at step **300**, the process of determining an object's geographic position is initiated. At step **310**, the system selects a subset of uncontrolled transmitters from a plurality of possible uncontrolled transmitters. At steps **330** and **340**, scattered and reference transmissions are received from at least one uncontrolled transmitter. At step **350**, scattered and reference transmissions are compared. At step **352**, the system determines whether the object is new. If the object is determined to be new, the system determines the initial object state estimation at step **354** using frequency-difference-of-arrival, time-difference-of-arrival, and angle-of-arrival information determined from the received transmissions. If the object is not new, the system proceeds to step **360** and updates the object state estimate based primarily on frequency-difference-of-arrival information. At step **370**, the system determines whether the object is moving and within range. If the object is moving and is within the range of the system, the system outputs the object state estimates at step **380**, and returns to step **330**. If the object is not moving or is out of range at step

6

370, the process is terminated. Each of these steps is described in greater detail below.

At step **310**, the system selects a subset of uncontrolled transmitters. The step may comprise selecting a subset of uncontrolled transmitters from a plurality of uncontrolled transmitters based on a set of predetermined criteria. Such criteria may include the spatial separation and signal strength of the individual transmitters, whether there is a clear line of site between the transmitter and the PCL system, the frequency characteristics of the transmitter, interference from other sources including transmitters, and other criteria. Other criteria may be used. The selection of transmitters may be done in advance or may be performed dynamically and updated periodically based on current transmission signals. Alternately, because most of the information needed to select transmitters is public record, recommended transmitters for a particular location may be predetermined.

Once the transmitters are identified, the PCL system receives reference transmissions from the transmitter at step **330**. At step **340**, the PCL system receives scattered transmissions that originated from the transmitter and were scattered by the object in the direction of the receiver. At step **350**, the scattered and reference transmissions are compared to determine measurement differentials, such as the frequency-difference-of-arrival and the time-difference-of-arrival, and the angle of arrival of the scattered signal is determined using a phased array. Appropriate techniques for determining the frequency-difference-of-arrival and the time-difference-of-arrival include standard cross-correlation techniques.

At step **352**, the system determines whether the compared signals correlate to a new object or an object that has previously been identified by the system. If the object is determined to be new, the system determines an initial object state estimate at step **354**. In a preferred embodiment, initial object state information may be determined from the frequency-difference-of-arrival and time-difference-of-arrival between scattered transmission **113** and reference transmission **111** as well as angle-of-arrival information for scattered transmission **113**.

In another embodiment, the system may assume an initial object position. Additionally, the system may allow a user to input an initial object location. For example, an air traffic controller may input an initial estimate position based on a location reported by an incoming pilot. Additionally, the controller may provide the information based on personal observation, such as identifying a location of an airplane on a runway preparing to take-off. Furthermore, the object may have a positional device, such as a global positioning system, that may provide the data to the system electronically. A combination of the aforementioned methods and other methods of determining initial state information may be used. Once an initial state estimate is determined, the system proceeds to step **370**.

If, at step **352**, the system determines that the object is not a new object, the system proceeds to step **360**. At step **360**, the system updates the object's state estimate based primarily on the frequency-difference-of-arrival between scattered transmission **113** and reference transmission **111**. In one embodiment, the system may update the object's state estimate based solely on the frequency-difference-of-arrival between scattered transmission **113** and reference transmission **111**, without reference to time-difference-of-arrival and angle-of-arrival information. In one embodiment, this information is stored in memory for subsequent use.

The frequency-difference-of-arrival information and other transmission and transmission comparison information may be used in conjunction with the initial object state estimation to determine an updated object state estimate. If transmissions are being processed from a plurality of transmitters for a single object, the system may determine an updated object state estimate by determining a location in three-dimensional space from which the object could cause each of the determined frequency shifts. Based on the signal strength, the accuracy of the initial object state estimation, the processing speed of the system and other factors, the system may be able to resolve the object to a point or area in three-dimensional space. Additionally, the system may determine an accuracy rating associated with the updated object state estimate based on these and other factors. Once the system has updated the object state estimate, it proceeds to step 370.

At step 370, the system determines whether the object is moving and within range of the system. If the object is moving, the system proceeds to step 380 and outputs the object state information. This output may be provided to a CRT display associated with the system, a network connection, a wireless network connection, a cockpit datalink and display, or other output device. In one embodiment, the system may output an accuracy rating for the object state estimate.

After the object's state estimate is output, the system returns to step 330 and reiterates steps 330 to 370 until the system determines that the object is no longer moving or is out of range of the system. Based on the high speed at which the system processes data and the relatively low speed at which the system may output data, the system may skip step 380 during one or more subsequent iterations. Once the system determines that the object is no longer moving, or determines that the object is out of range, the system proceeds to step 390 and the process terminates.

In addition to providing information about airplanes, the present invention may be used to provide information about ground vehicles, such as those on an aircraft runway. Because the frequency shift caused by a slower moving ground vehicle may be relatively small, accurate initial object state estimation may be used. For example, ground vehicles could be directed to a particular location prior to entering a runway so that the system may quickly establish and maintain an accurate object state estimate. Additionally, the system may store object state information for objects that have stopped moving, and utilize this state information as an initial object state estimate when the object begins moving again.

In another embodiment, the present invention may be used to enable a mobile radar system that provides enhanced airspace awareness during a predetermined event using ambient transmissions from at least one uncontrolled transmitter. In one embodiment, the present invention is used as part of a wheeled or tracked, vehicle-based monitoring system in which a vehicle is deployed to a predetermined location to receive ambient transmissions from at least one uncontrolled transmitter. This vehicle may be a non-commercial vehicle such as a passenger van. This aspect of the present invention may be used to monitor an airspace for a special event such as the Olympics, a fireworks display, or other event.

In one embodiment, the present invention may be used to simultaneously track a plurality of objects. For example, the present invention may be used to simultaneously track a number of aircraft approaching and/or within the airspace of an airport and a number of aircraft and/or vehicles stationary and/or moving on the airport premises. The system may use warnings to notify a controller, a pilot and/or a driver that an object is within a predetermined distance. Also, the system

may use warnings to notify a controller, a pilot and/or a driver that one or more objects have a potentially unsafe course, such as a course that may cause a collision. Other warnings may also be used.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention. For example, although the present invention has been described with relation to a PCL system, it is possible to employ aspects of this invention with other types of radar systems including conventional monostatic radar systems. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A system for enhancing object state awareness to track a plurality of approaching airborne objects, comprising:

a receiver subsystem to receive reference signals from an uncontrolled transmitter and scattered transmissions originating from the uncontrolled transmitter and scattered by an object of said plurality of approaching airborne objects;

a front-end processing subsystem to determine a radial velocity of the object based on the received transmissions and to buffer digitized transmission replicas of the received transmissions; and

a back-end processing subsystem to receive the digitized transmission replicas of the received transmissions and to determine object state estimates based on the determined radial velocity, wherein said front-end processing subsystem and said back-end processing subsystem are remotely located relative to one another.

2. The system of claim 1, wherein said scattered transmissions comprise ambient transmissions.

3. The system of claim 1, further comprising initial position information for said object, wherein said initial position information of an airborne object is communicated to said system separately from said scattered transmissions.

4. The system of claim 1, further comprising an output device to display said object state estimates.

5. The system of claim 1, further comprising a communication link to couple said receiver subsystem, said front-end processing subsystem and said back-end processing subsystem.

6. A passive coherent location system for monitoring a predetermined location within airspace, comprising:

a receiver subsystem to receive scattered transmissions scattered by an object within said airspace and to output digitized signals of said scattered transmissions, said scattered transmissions originating from an uncontrolled transmitter;

a front-end processing subsystem to determine a frequency-difference-of-arrival for said digitized signals and to buffer digitized transmission replicas of said digitized signals; and

a back-end processing subsystem to receive the digitized transmission replicas and to determine positional information for said object in accordance with said frequency-difference-of-arrival, wherein said front-end processing subsystem and said back-end processing subsystem are independent and remotely located relative to one another.

7. The system of claim 6, further comprising an output device to provide said positional information for said object.

8. The system of claim 6, further comprising a reference signal from said uncontrolled transmitter, said reference signal being used to determine said frequency-difference-of-arrival for said digitized signals.

9. The system of claim 6, further comprising a radial velocity calculation of said object determined from said frequency-difference-of-arrival.

10. The system of claim 6, further comprising an antenna subsystem to detect said scattered transmissions.

11. The system of claim 10, wherein said antenna subsystem comprises a phased array antenna.

12. The system of claim 6, wherein said receiver subsystem comprises an ultrahigh dynamic range receiver.

13. The system of claim 6, further comprising a communication link between said front-end processing subsystem and said back-end processing subsystem.

14. A method for determining an updated state estimate for an object, comprising:

receiving a reference transmission from an uncontrolled transmitter and a scattered transmission that originated from said uncontrolled transmitter and that was scattered by the object;

using a front-end processing system, comparing the received transmissions to determine a measurement differential;

updating a previous state estimate based on the determined measurement differential;

buffering digitized transmission replicas of said received transmissions, wherein said digitized replicas are received by a back-end processing subsystem remotely located relative to said front-end processing system; and

issuing a warning when said object is within a predetermined distance from a ground location.

15. The method of claim 14, further comprising determining an initial state estimate for said object.

16. The method of claim 14, further comprising selecting said uncontrolled transmitter from a plurality of transmitters.

17. The method of claim 14, further comprising determining whether said object is moving.

18. The method of claim 14, further comprising outputting said updated state estimate.

19. The method of claim 14, further comprising terminating said receiving when said object is out-of-range.

20. The method of claim 14, wherein said warning is issued to an air traffic control system.

21. The method of claim 14, wherein said warning is issued to a pilot.

22. A method for determining an updated state estimate for an object, comprising:

receiving a reference transmission from an uncontrolled transmitter and a scattered transmission that originated from said uncontrolled transmitter and was scattered by the object;

using a front-end processing system, comparing the received transmissions to determine a measurement differential;

updating a previous state estimate based on the measurement differential;

buffering digitized transmission replicas of said received transmissions, wherein said digitized replicas are received by a back-end processing subsystem remotely located relative to said front-end processing system; and

issuing a warning when said object undertakes an airpath, wherein said airpath intersects with another object.

23. A method for tracking an object using a civil aviation passive coherent location system, comprising:

selecting a transmitter transmitting a reference transmission;

receiving said reference transmission;

receiving a scattered transmission scattered by an object within an airspace, wherein said scattered transmission is transmitted from said transmitter;

using a front-end processing system, comparing said scattered transmission to said reference transmission to determine measurement differentials;

buffering digitized transmission replicas of said scattered transmissions and said reference transmissions, wherein said digitized transmission replicas are received by a back-end processing subsystem remotely located relative to said front-end processing system; and

updating an object state estimate according to said measurement differentials.

24. The method of claim 23, further comprising outputting said updated object state estimate.

25. The method of claim 23, wherein said measurement differentials include a frequency-difference-of-arrival.

26. The method of claim 23, wherein said measurement differentials include a time-difference-of-arrival.

27. The method of claim 23, wherein said measurement differentials include an angle of arrival.

28. A system for determining an updated state estimate for an object, comprising:

means for receiving a reference transmission from an uncontrolled transmitter and a scattered transmission that originated from said uncontrolled transmitter and was scattered by the object;

means for comparing the received transmission within a front-end processing subsystem to determine a measurement differential;

means for updating a previous state estimate based on the determined measurement differential;

means for buffering digitized transmission replicas of said received transmissions, wherein said digitized replicas are received by a back-end processing subsystem remotely located relative to said front-end processing system; and

means for issuing a warning when said object is within a predetermined distance.

29. A system for determining an updated state estimate for an object, comprising:

means for receiving a reference transmission from an uncontrolled transmitter and a scattered transmission that originated from said uncontrolled transmitter and was scattered by the object;

means for comparing the received transmission within a front-end processing subsystem to determine a measurement differential;

means for updating a previous state estimate based on the measurement differential;

means for buffering digitized transmission replicas of said received transmissions, wherein said digitized replicas are received by a back-end processing subsystem remotely located relative to said front-end processing system; and

means for issuing a warning when said object undertakes an airpath, wherein said airpath intersects with another object.

30. A system for tracking an object using a civil aviation passive coherent location system, comprising:

means for selecting a transmitter transmitting a reference transmission;

means for receiving said reference transmission;

means for receiving a scattered transmission scattered by an object within an airspace, wherein said scattered transmission is transmitted from said transmitter;

11

means for comparing said scattered transmission to said reference transmission within a front-end processing subsystem to determine measurement differentials;
 means for buffering digitized transmission replicas of said scattered transmissions and said reference transmissions, wherein said digitized transmission replicas are received by a back-end processing subsystem remotely located relative to said front-end processing system and wherein said buffered digitized transmission replicas can be transmitted for analysis upon request by a user; and
 means for updating an object state estimate according to said measurement differentials.

31. A system for enhancing object state awareness to track a plurality of approaching airborne objects, comprising:
 a receiver subsystem to receive reference signals from a plurality of controlled and uncontrolled transmitters and scattered transmissions originating from the plu-

12

ality of transmitters and scattered by an object of said plurality of approaching airborne objects;
 a front-end processing subsystem to determine a radial velocity of the object based on the received transmissions and to buffer digitized transmission replicas of the received transmissions; and
 a back-end processing subsystem to receive the digitized transmission replicas of the received transmissions to determine object state estimates based on the determined radial velocity, wherein said front-end processing subsystem and said back-end processing subsystem are remotely located relative to one another.

32. The method of claim **14**, further comprising receiving an initial state estimate for said object separately from said scattered transmission.

* * * * *